


**PRODUCT NO. 050734**

**PRODUCT: High Strength Windbreak Cladding**

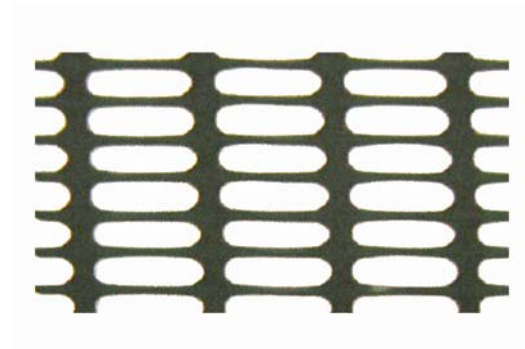

<b>DESCRIPTION:</b>	
Extruded plastic high tensile strength windbreak mesh offers strong wind speed reduction. Must be installed by battening to wooden posts. Use of a straining wire is advisable.	


<b>PHYSICAL CHARACTERISTICS:</b>	
POLYMER	HDPE
COLOUR	Dark Green
UV STABILISED	Yes

<b>DIMENSIONAL CHARACTERISTICS:</b>	
HEIGHT	1 m
ROLL LENGTH	50 m
ROLL DIAMETER	21cm

<b>TECHNICAL CHARACTERISTICS:</b>	
TENSILE STRENGTH (MD)	10 kN/m
WEIGHT	300 g/m <sup>2</sup>
MESH SIZE	10 x 35mm

Packaging: - As required.

For and on behalf of Boddingtons Limited

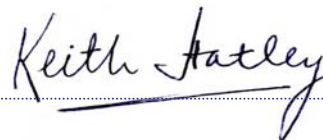

Quality Manager

All the above information is given in good faith, but the figures are typical values only and should not be taken as a guarantee of performance. Manufacturing tolerances for dimensional and technical characteristics apply and are available on request. The company reserves the right to improve the product and adjust the specification without notice.

SPEC 050734
Issue: 1
Page 1 of 1
Date: 06/09/07



Certificate No. FM 33039

**BODDINGTONS LIMITED**

Blackwater Trading Estate • The Causeway • Maldon • Essex CM9 4GG • England  
 Tel: +44 (0) 1621 874200 Fax: +44 (0) 1621 874299  
 e.mail: sales@boddingtons-ltd.com • www.boddingtons-ltd.com